

Pressure Reducing Valve

Model Number 104198

Features

- Corrosion Resistant Sealed Body and Bonnet
- 100% Factory Tested
- Integral SS Strainer
- Low Lead Forged Brass Body and Moving Parts
- Anti-tempering Cap
- Optional Attachment for Pressure Gauge

Size

□ 1/2" NPT

Material Specifications


Part Name	Material
Body	Brass, EN 12165 CW724R
Covers	Glass Reinforced Nylon PA6G30
Diaphragm	Peroxide-cured EPDM
Seat	Peroxide-cured EPDM
Stern	Stainless Steel EN10088-3 AISI303
Filter	Stainless Steel EN10088-3 AISI303
Piston Rings	PTFE

Performance Rating

Maximum Supply Pressure up to 250 psi

Temperature Range 33° F -180° F

Set Pressure: 15 psig

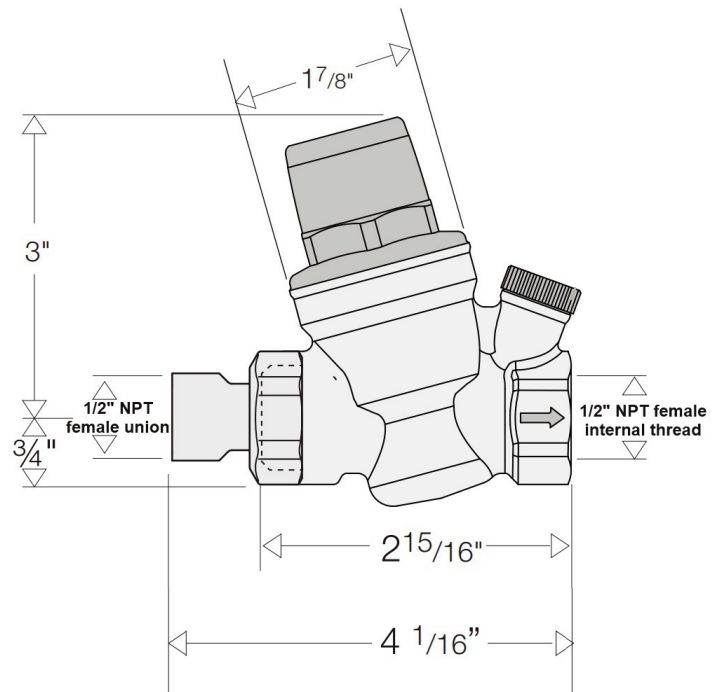

Approvals



ASSE 1003

NSF 61

FOR ILLUSTRATIVE PURPOSES ONLY. IMPORTANT NOTE: FOR SAFE AND TROUBLE FREE INSTALLATION

Before installation visit mrsteam.com to download the Installation, Operation and Maintenance Manual or refer to the manual provided with the unit.

MODEL	PROJECT INFORMATION	
□ 104198	Location:	Contractor:
	Architect:	Submitted By:
	Engineer:	Date:
Notes:		

TS0072 REV 9.24